
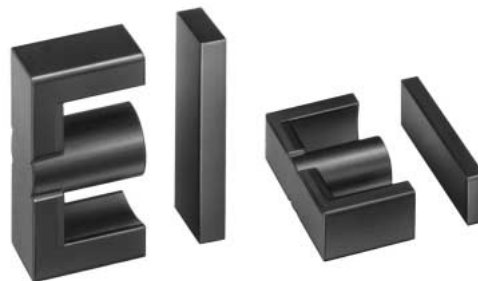


形状・寸法 / 特性

Shapes and dimensions/Characteristics

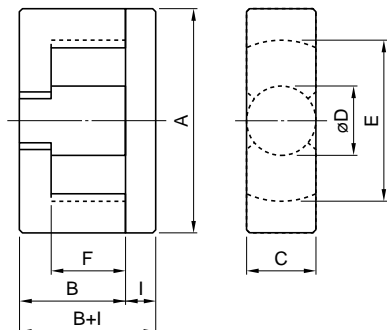

| 形状 Type | 寸法 Dimensions(mm) | | | | | | | | Bobbin |
|------------|-------------------|-----------|-----------|-----------|-----------|--------|-----------|-----------|--------|
| | A | B+l | B | C | øD | E min. | F | l | |
| EIR-12.4D | 12.4±0.25 | 5.00±0.20 | 4.10±0.10 | 5.00±0.15 | 3.40±0.10 | 10.4 | 3.10±0.10 | 0.90±0.10 | |
| EIR-25.5 | 25.5±0.6 | 18.6±0.5 | 15.5±0.3 | 7.50±0.25 | 7.50±0.25 | 19.7 | 12.4±0.3 | 3.10±0.20 | |
| EIR-28.5P | 28.5±0.6 | 16.7±0.4 | 13.7±0.2 | 11.4±0.25 | 9.90±0.25 | 21.0 | 9.30±0.30 | 3.00±0.20 | |
| EIR-28.5N | 28.5±0.6 | 17.6±0.4 | 14.6±0.2 | 11.4±0.3 | 9.90±0.30 | 21.1 | 10.2±0.2 | 3.00±0.20 | |
| EIR-28.5 | 28.5±0.6 | 21.3±0.5 | 16.9±0.3 | 11.4±0.3 | 9.90±0.30 | 21.1 | 12.5±0.3 | 4.40±0.20 | |
| EIR-30K | 30.0±0.5 | 26.5±0.5 | 21.5±0.2 | 12.0±0.2 | 12.0±0.2 | 20.2 | 16.5±0.2 | 5.00±0.30 | |
| EIR-35 | 35.0±0.9 | 29.4±0.55 | 24.4±0.3 | 11.3±0.3 | 11.3±0.25 | 25.2 | 18.4±0.4 | 5.00±0.25 | |
| EIR-40 | 40.0±0.8 | 34.3±0.7 | 27.3±0.4 | 13.3±0.3 | 13.3±0.3 | 27.25 | 20.3±0.4 | 7.00±0.30 | |
| EIR-90 | 90.0±1.8 | 55.0±0.95 | 45.0±0.65 | 30.0±1.0 | 30.0±1.0 | 68.5 | 35.5±0.5 | 10.0±0.3 | |
| EIR-94 | 94.0±1.8 | 59.5±0.95 | 47.5±0.65 | 30.0±1.0 | 30.0±1.0 | 68.5 | 35.5±0.5 | 12.0±0.3 | |

| 形状 Type | AL value(nH/N ²)±25% | | | | コア定数 Core parameters | | | | | Weight (g/set) |
|------------|----------------------------------|-------|-------|------|------------------------------------|--------|----------------------|------------------------|----------------------|-------------------|
| | MB1 | MB3 | MB4 | MBT1 | C _l (mm ⁻¹) | Le(mm) | Ae(mm ²) | Amin(mm ²) | Ve(mm ³) | |
| EIR-12.4D | 929 | 800 | 800 | 1290 | 1.85 | 17.1 | 9.21 | 8.88 | 157 | 0.85 |
| EIR-25.5 | 1850 | 2200 | 2200 | 2750 | 1.08 | 47.6 | 44.3 | 42.4 | 2110 | 11.1 |
| EIR-28.5P | 3610 | 4170 | 4170 | 5240 | 0.526 | 42.4 | 80.6 | 68.4 | 3420 | 19.2 |
| EIR-28.5N | 3500 | 4300 | 4300 | 5100 | 0.548 | 44.2 | 80.6 | 68.4 | 3560 | 19.9 |
| EIR-28.5 | 3410 | 4300 | 4300 | 5030 | 0.578 | 50.0 | 86.6 | 77.0 | 4330 | 24.0 |
| EIR-30K | 4140 | 4930 | 4930 | 6180 | 0.486 | 57.8 | 119 | 113 | 6880 | 37.0 |
| EIR-35 | 3350 | 4010 | 4010 | 5070 | 0.621 | 67.9 | 109 | 100 | 7430 | 40.2 |
| EIR-40 | 4280 | 5140 | 5140 | 6530 | 0.492 | 76.6 | 156 | 139 | 11900 | 65.4 |
| EIR-90 | 9560 | 11700 | 11700 | | 0.237 | 145 | 614 | 544 | 89100 | 486 |
| EIR-94 | 10700 | 13100 | 13100 | | 0.212 | 151 | 713 | 707 | 108000 | 582 |