


形状・寸法 / 特性

Shapes and dimensions/Characteristics

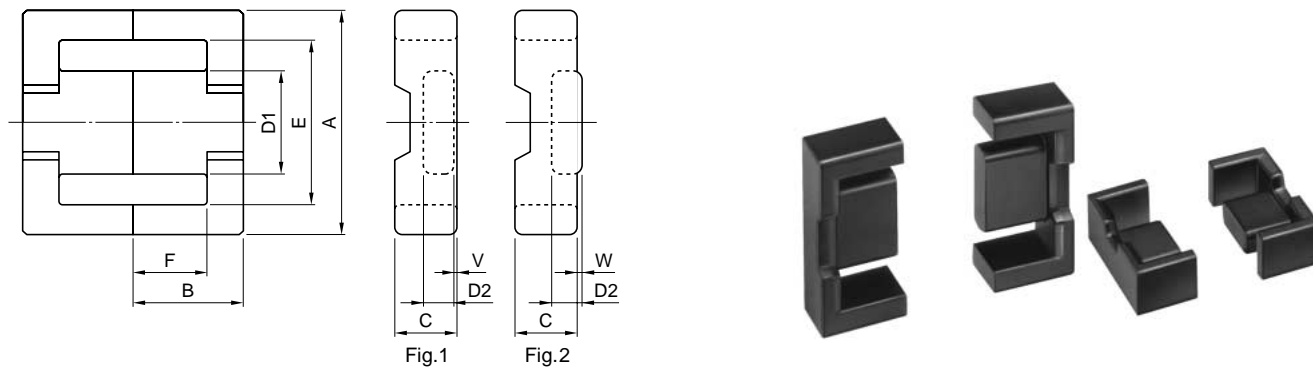

形状 Type	寸法 Dimensions(mm)											Fig.
	A	2B	B	C	D1	D2	E min.	2F min.	F	V	W	
EES-15A	15.0±0.3	15.0	7.50±0.20	4.65±0.20	5.30±0.20	2.40±0.15	10.6	10.6	5.50±0.20		0.20	2
EES-20A	20.0±0.4	20.0	10.0±0.25	6.70±0.30	8.90±0.25	3.50±0.20	15.1	14.9	7.70±0.25	0.15		1
EES-25A	24.7±0.65	25.0	12.5±0.25	9.70±0.20	11.4±0.2	5.20±0.15	18.1	18.1	9.30±0.25	0.50		1
EES-30A	30.0±0.8	30.0	15.0±0.25	9.20±0.20	14.6±0.25	4.80±0.25	21.65	21.8	11.2±0.3	0.75		1

形状 Type	AL value(nH/N <sup>2</sup> )±25%				コア定数 Core parameters					Weight (g/set)
	MB1	MB3	MB4	MBT1	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Amin(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	
EES-15A	905	1070	1070	1330	2.14	33.6	15.7	12.7	527	3.0
EES-20A	1330	1590	1590	1990	1.50	47.6	31.7	29.5	1510	7.5
EES-25A	2140	2480	2480	3210	0.954	58.5	61.3	58.2	3590	18
EES-30A	2200	2640	2640	3350	0.951	69.7	73.3	69.9	5120	25