
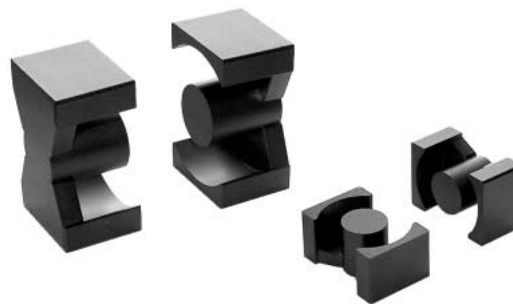


形状・寸法 / 特性

Shapes and dimensions/Characteristics

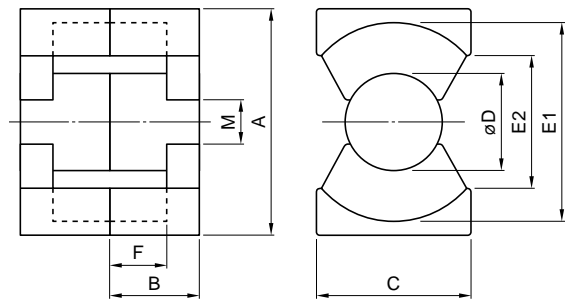

形状 Type	通称 Alias	寸法 Dimensions(mm)									
		A	2B	B	C	øD	E1	E2 min.	2F min.	F	M min.
EERX-20A	PQ2016	20.5±0.4	16.2	8.10±0.10	14.0±0.4	8.80±0.20	18.0±0.4	12.0	10.0	5.15±0.15	4.0
EERX-20B	PQ2020	20.5±0.4	20.2	10.1±0.1	14.0±0.4	8.80±0.20	18.0±0.4	12.0	14.0	7.15±0.15	4.0
EERX-26A	PQ2620	26.5±0.45	20.14	10.07±0.13	19.0±0.45	12.0±0.2	22.5±0.45	15.5	11.2	5.75±0.15	6.0
EERX-26B	PQ2625	26.5±0.45	24.74	12.37±0.13	19.0±0.45	12.0±0.2	22.5±0.45	15.5	15.8	8.05±0.15	6.0
EERX-32A	PQ3220	32.0±0.5	20.54	10.27±0.13	22.0±0.5	13.45±0.25	27.5±0.5	19.0	11.2	5.75±0.15	5.5
EERX-32B	PQ3230	32.0±0.5	30.34	15.17±0.13	22.0±0.5	13.45±0.25	27.5±0.5	19.0	21.0	10.65±0.15	5.5
EERX-35A	PQ3535	35.1±0.6	34.74	17.37±0.13	26.0±0.5	14.35±0.25	32.0±0.5	23.5	24.7	12.5±0.15	6.0
EERX-40A	PQ4040	40.5±0.9	39.74	19.87±0.13	28.0±0.6	14.9±0.3	37.0±0.6	28.0	29.2	14.75±0.15	6.3
EERX-50A	PQ5050	50.0±0.7	49.95	24.98±0.13	32.0±0.6	20.0±0.35	44.0±0.7	31.5	35.8	18.05±0.15	6.0

形状 Type	通称 Alias	AL value(nH/N <sup>2</sup> )±25%				コア定数 Core parameters					Weight (g/set)
		MB1	MB3	MB4	MBT1	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Amin(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	
EERX-20A	PQ2016	3300	3880	3880	4900	0.610	37.4	62.0	60.8	2320	13
EERX-20B	PQ2020	2690	3150	3150	3960	0.740	45.4	62.0	60.8	2820	15
EERX-26A	PQ2620	4800	5630	5630	6920	0.390	46.3	119	113	5510	31
EERX-26B	PQ2625	4150	4920	4920	6110	0.470	55.5	118	113	6550	36
EERX-32A	PQ3220	6260	7310	7310	9360	0.330	55.5	170	142	9440	42
EERX-32B	PQ3230	4290	5140	5140	6370	0.460	74.6	161	142	12000	55
EERX-35A	PQ3535	4150	4860	4860	5980	0.450	87.9	196	162	17200	73
EERX-40A	PQ4040	3680	4300	4300	5310	0.510	102	201	174	20500	95
EERX-50A	PQ5050	5670	6720	6720	8330	0.344	113	328	314	37100	195