


形状・寸法  
Shapes and dimensions

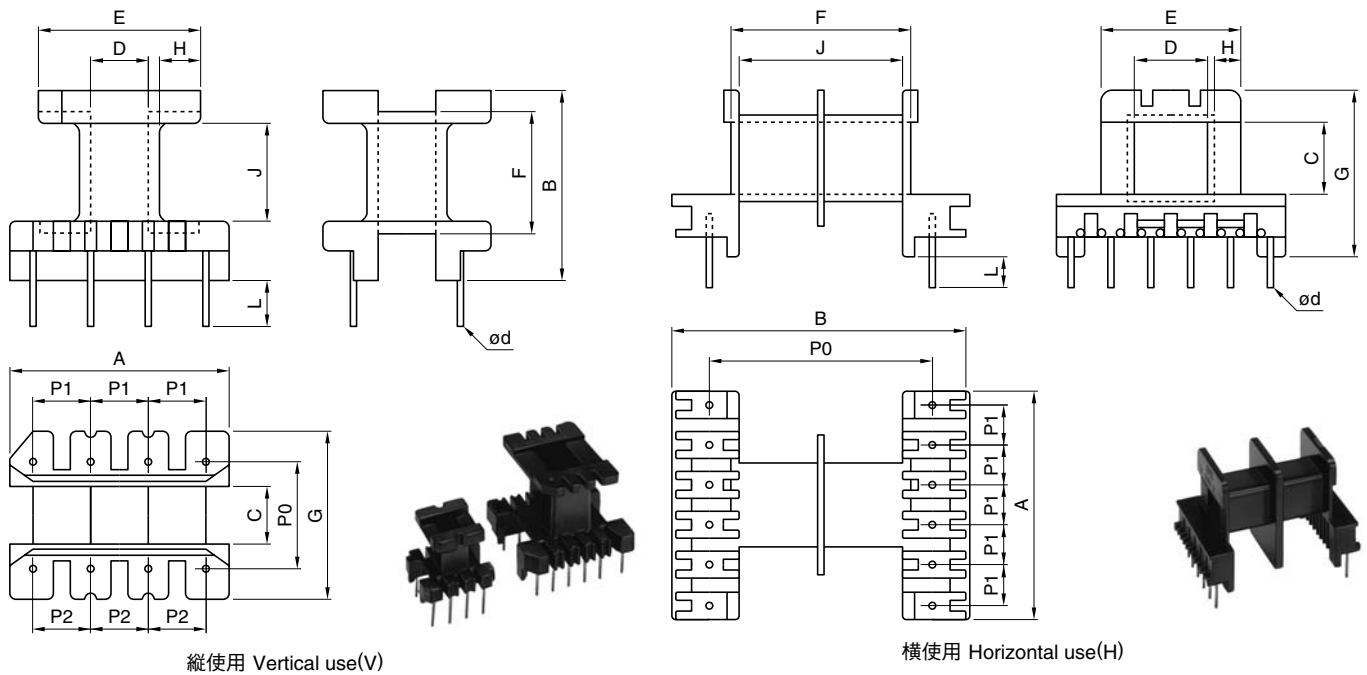

形状 Type	寸法 Dimension(mm)														No. of terminal pins	コア方向*2 Core direction	適合コア Applied core	
	A max.	B max.	C*1 min.	D*1 min.	E*1 max.	F*1 max.	G max.	H min.	J min.	P1	P2	P0	ød	L			EE core	EI core
BE8.3KP6	8.1	7.7	4.05	2.05	5.7	5.7	8.1	1.3	4.6	2.5	2.5	6.0	□0.4	3.7	3-3	V	EE8.3	
BE10.2KP8	10.3	9.1	5.15	2.65	7.3	8.0	10.3	1.8	6.6	2.5	2.5	8.0	□0.49	3.7	4-4	V	EE10.2	
BE12.5LP10	12.5	8.3	5.3	2.7	8.6	4.8	12.5	2.3	3.3	2.5	2.5	7.5	□0.49	4.0	5-5	V	EI12.5	
BE13KP10	12.2	10.4	6.4	3.0	10.0	8.9	12.7	2.9	7.3	2.5	2.5	8.5	□0.49	3.7	5-5	V	EE13D	
BE16AP10	16.2	13.9	5.0	4.25	11.6	9.9	13.2	2.9	8.0	3.3	3.3	10.5	0.6	5.5	5-5	V	EE16A	EI16
BE19NP8	19.1	16.5	5.4	4.9	14.1	10.7	15.1	3.4	8.4	5.0	5.0	10.0	0.6	4.0	4-4	V	EE19A	EI19, 20K
BE22KP8	22.2	16.4	6.1	6.1	15.2	10.3	17.2	3.6	8.4	5.0	5.0	12.5	0.8	6.0	4-4	V	EE22A	EI22, D
BE22NP8	22.2	27.7	6.2	6.2	15.3	20.6	17.2	3.3	18.3	5.0	5.0	12.5	0.8	4.0	4-4	V	EE22B, K	
BE25NP8	25.0	19.3	7.3	7.1	17.6	11.9	17.7	4.1	9.6	5.0	5.0	12.5	0.8	3.5	4-4	V		EI25D
BE25PP11	26.5	16.9	7.2	7.1	18.0	11.9	19.2	4.5	9.9	4.5	5.5	15.6	0.8	6.0	6-5	V		EI25D
BE28AP12	28.5	19.3	11.2	7.7	18.6	11.8	23.8	4.4	9.8	5.0	5.0	18.0	0.8	3.8	6-6	V	EE28S	EI28
BE28PP10	26.0	20.6	11.4	7.8	18.2	11.8	22.0	4.1	9.8	5.0	5.0	17.5	0.8	3.5	5-5	V	EE28S	EI28
BE30KP12	30.2	24.7	11.3	11.1	19.8	15.8	26.2	3.0	13.4	5.0	5.0	20.0	0.8	5.0	6-6	V	EE30A	EI30
BE30NP10	30.2	24.7	11.3	11.2	19.2	15.6	25.0	2.7	13.6	5.0	5.0	20.0	0.8	7.0	5-5	V	EE30A	EI30
BE30AP12	30.2	47.7	11.1	11.1	19.5	32.0	26.6	3.1	13.0	5.0		40.0	0.8	5.5	6-6	H	EE30B	
BE33KP10	26.2	23.0	13.2	10.2	22.8	18.3	28.2	5.3	16.3	5.0	5.0	22.5	0.8	7.5	5-5	V	EE33K	EI33, E
BE33MP12	33.2	28.8	13.3	10.3	23.2	18.7	28.2	5.3	16.5	5.0	5.0	22.5	0.8	7.0	6-6	V	EE33K	EI33E
BE35LP10	32.2	26.7	10.5	10.5	23.9	17.8	25.7	5.5	15.0	5.0	5.0	20.0	0.8	7.0	5-5	V	EE35A	EI35A
BE35NP12	30.2	24.7	10.5	10.5	24.2	17.5	25.2	5.6	15.3	5.0	5.0	20.0	0.8	7.0	6-6	V	EE35A	EI35A
BE40KP12	32.1	32.5	12.2	12.2	27.2	19.9	28.2	6.3	17.6	5.0	5.0	22.5	0.8	5.0	6-6	V	EE40A	EI40
BE40MP12	32.1	32.5	12.2	12.2	27.2	19.9	28.2	6.3	17.6	5.0	5.0	25.0	0.8	5.0	6-6	V	EE40A	EI40
BE40NP12	36.0	30.7	12.2	12.2	26.5	19.7	30.2	6.6	17.2	5.0	5.0	25.0	0.8	7.0	6-6	V	EE40E	EI40
BE40AP12	36.2	59.2	12.0	12.0	27.0	40.6	31.5	6.3	37.8	6.0		50.0	1.0	5.5	6-6	H	EE40H	
BE40BP7	40.0	59.2	12.1	12.1	27.0	39.8	31.4	6.0	37.0	6.0		50.0	1.0	4.1	7-7	H	EE40B	
BE44LP16	40.0	34.0	15.3	12.4	30.6	22.8	34.0	8.0	19.9	5.0	5.0	27.5	1.0	4.5	8-8	V	EE44E	EI44
BE50MP12	50.2	36.8	15.2	15.2	33.3	24.1	36.3	7.9	21.1	7.5	7.5	27.5	1.0	9.0	6-6	V	EE50A	EI50
BE60LP12	56.2	38.8	16.5	16.5	43.5	27.2	45.2	12.2	23.7	7.5	7.5	35.0	1.0	5.0	6-6	V	EE60A	EI60

\*1コア勘合面 \*2V=縦使用 Vertical use、H=横使用 Horizontal use