


FERRITE CORES FOR POWER SUPPLY

EEH コア EEH Cores



形状・寸法／特性

Shapes and dimensions/Characteristics

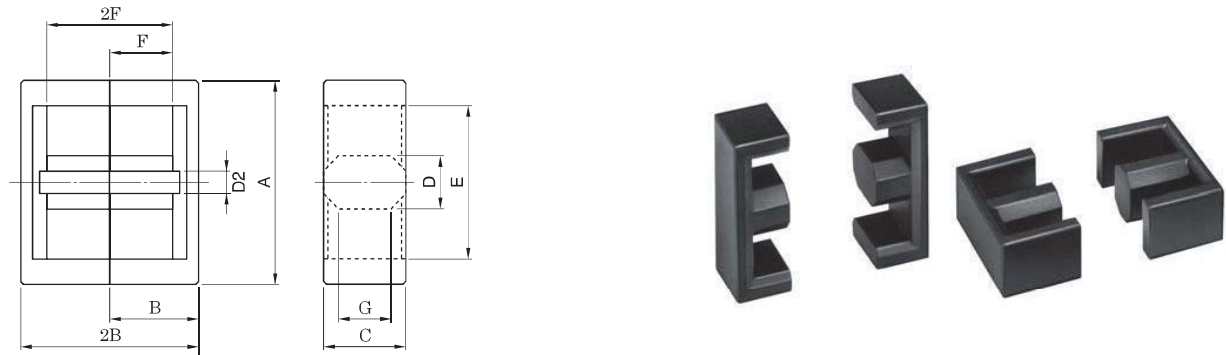

形状 Type	寸法 Dimensions(mm)									
	A	2B	B	C	D	D2	E min.	2F min.	F	G
EEH-22L	22.0±0.4	19.2	9.60±0.20	9.00±0.20	6.50±0.15	2.45	16.0	13.2	6.80±0.20	5.35
EEH-22K	22.0±0.4	29.0	14.5±0.2	9.00±0.20	6.50±0.15	2.45	16.0	23.0	11.7±0.2	5.35
EEH-28A	28.0±0.4	20.4	10.2±0.15	11.9±0.2	8.50±0.15	2.76	20.7	13.2	6.80±0.20	6.55
EEH-29M	29.3±0.4	18.2	9.10±0.20	12.05±0.25	8.50±0.15	3.5	21.6	10.6	5.50±0.20	7.2
EEH-29L	29.3±0.4	21.8	10.9±0.2	12.05±0.25	8.50±0.15	3.5	21.7	14.2	7.30±0.20	7.2
EEH-29K	29.3±0.4	29.2	14.6±0.2	12.05±0.25	8.50±0.15	3.5	21.7	21.6	11.0±0.2	7.2
EEH-29N	29.3±0.4	29.6	14.8±0.2	12.05±0.25	8.50±0.20	3.5	21.6	22.0	11.2±0.2	7.2
EEH-33A	33.0±0.5	25.0	12.5±0.2	11.85±0.25	8.35±0.30	2.9	25.5	17.5	8.93±0.18	7.3
EEH-33K	33.0±0.5	33.4	16.7±0.2	13.0±0.3	10.5±0.3	3.0	23.5	24.7	12.0±0.15	7.5

形状 Type	Al. value(nH/N ²)±25%				コア定数 Core parameters					Weight (g/set)
	MB1H	MB3	MB4	MBT1	C ₁ (mm ⁻¹)	Le(mm)	Ae(mm ²)	Amin(mm ²)	Ve(mm ³)	
EEH-22L	1770	2450	2450	3200	0.857	42.5	49.7	49.2	2110	12.0
EEH-22K	1310	1900	1900	2470	1.25	62.1	49.7	49.2	3090	16.8
EEH-28A	2660	3930	3930	4850	0.572	46.6	81.4	80.2	3790	22.0
EEH-29M	3020	4430	4430	5430	0.493	42.4	86.1	84.8	3660	21.6
EEH-29L	2690	3500	3500	4910	0.576	49.6	86.2	84.8	4280	24.7
EEH-29K	2190	3000	3000	4110	0.746	64.4	86.4	84.8	5570	31.0
EEH-29N	2170	3000	3000	4080	0.755	65.2	86.4	84.8	5640	31.3
EEH-33A	2230	3100	3100	4170	0.721	60.0	83.2	80.9	5000	28.1
EEH-33K	2600	3860	3860	4930	0.638	72.2	113	109	8180	45.8

Specifications which provide more details for the proper and safe use of the described product are available upon request.
All specifications are subject to change without notice.