



形状・寸法/特性

Shapes and dimensions/Characteristics

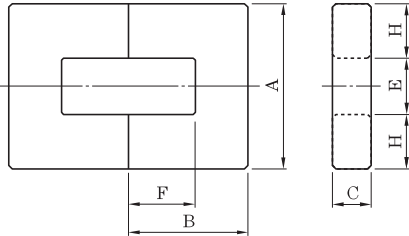

形状 Type	寸法 Dimensions(mm)								Bobbin
	A	2B	B	C	E	2F min.	F	H	
UU-9,7L	9,70±0,30	14,7	7,35±0,15	2,70±0,15	4,30±0,30	8,30	4,30±0,15	2,70±0,15	
UU-10,5D	10,5±0,15	15,6	7,80±0,10	5,00±0,15	5,50±0,15	10,0	5,25±0,25	2,50±0,20	○
UU-10,5T	10,5±0,2	15,8	7,90±0,10	5,00±0,15	5,30min.	10,2	5,35±0,25	2,50±0,20	○
UU-12L	12,0±0,3	17,3	8,65±0,10	5,10±0,15	6,15min.	11,7	5,95±0,10	2,75	
UU-15,7D	15,7±0,3	19,4	9,70±0,20	6,00±0,20	6,50min.	11,7	6,00±0,15	4,50	
UU-16K	16,0±0,2	21,4	10,7±0,15	6,00±0,15	6,84±0,30	11,9	6,10±0,15	4,58±0,10	
UU-19,7K	19,7±0,3	35,4	17,7±0,2	5,95±0,2	7,4min.	23,0	11,7±0,2	6,00±0,15	
UU-22K	22,15±0,55	21,6	10,8±0,2	5,80±0,20	10,0±0,3	9,2	5,00±0,40	6,10	
UU-25K	23,3±0,5	26,0	13,0±0,3	6,25±0,25	10,7±0,2	13,1	6,75±0,20	6,30±0,20	
UU-60P	60,0±0,8	56,0	28,0±0,3	30,0±0,45	≥29,55	26,0	13,0±0,4	(15,0)	
UU-60R	60,0±0,8	56,0	28,0±0,3	15,0±0,45	≥29,55	26,0	13,0±0,4	(15,0)	
UU-79A	79,0±2,5	129	64,5±1,25	31,5±1,0	34,0min.	83,5	42,5±0,75	22,0	
UU-80L	80,0±1,0	150	75,0±0,5	30,0±0,7	40,0±1,0	109,5	55,0±0,25	(20,0)	
UU-93K	93,0±1,8	152	76,0±0,5	30,0±0,5	34,6min.	94,2	48,0±0,9	28,0	
UU-100L	100,0±3,0	151	75,5±1,25	30,0±1,0	39,0min.	88,5	45,0±0,75	30,0	
UU-100K	100,0±3,0	160	80,0±1,25	20,0±1,0	39,0min.	98,5	50,0±0,75	30,0	
UU-101K	101,2±3,1	114,6	57,3±0,8	25,4±0,8	51,0±3,1	62,2	31,9±0,8	25,1	
UU-120K	120,0±3,0	160,0	80,0±1,25	20,0±1,0	59,0min	98,5	50,0±0,75	29,0	

形状 Type	AL value(nH/N <sup>2</sup> )±30%					コア定数 Core parameters					Weight (g/set)
	MB3	MA055	MA070	MA085	MA100	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Amin(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	
UU-9,7L	510			1210	1320	4,57	34,7	7,61	7,3	264	1,4
UU-10,5D			1590	1690	1830	3,17	39,9	12,6	12,5	503	2,6
UU-10,5T	750		1580	1680	1820	3,20	40,3	12,6	12,5	508	2,6
UU-12L	760	1280	1610	1720	1870	3,26	45,4	13,9	13,8	632	3,3
UU-15,7D	1110	1820	2060	2680	2910	2,02	49,9	24,8	22,2	1240	6,6
UU-16K	1190	1950		2870	3110	1,91	52,5	27,5	27,5	1440	7,6
UU-19,7K	1120	2140		2850	3130	2,27	81,0	35,7	35,7	2890	15,1
UU-22K	1380	2570	3090	3310	3590	1,70	58,6	34,4	33,6	2020	10,8
UU-25K	1500	2630	3200	3440	3750	1,74	68,1	39,2	39,1	2670	14,1
UU-60P	7890	15320				0,350	159	450	450	71600	390
UU-60R	3950	7660	9210			0,710	159	225	225	35800	195
UU-79A	6620	13570				0,446	309	693	693	214000	1100
UU-80L	4920	10200				0,600	363	600	600	21800	1140
UU-93K	7060	14590				0,421	354	840	840	297000	1540
UU-100L	7380	15250				0,392	355	905	905	321300	1630
UU-100K	4780	9920				0,623	374	600	600	224400	1130
UU-101K	6120	12500				0,482	309	641	638	198000	910
UU-120K	4340	7800				0,690	414	600	600	248400	1240

Specifications which provide more details for the proper and safe use of the described product are available upon request.  
All specifications are subject to change without notice.