
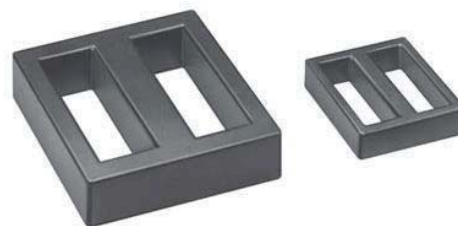


形状・寸法／特性

Shapes and dimensions/Characteristics

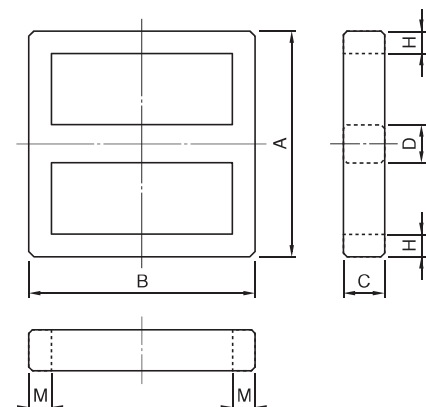

形状 Type	寸法 Dimensions(mm)					
	A	B	C	D	H	M
ET-20A	20,6±0,5	20,6±0,5	4,40±0,20	4,00±0,20	2,00±0,20	2,00±0,20
ET-24A	24,2±0,5	24,2±0,5	4,00±0,30	4,00±0,20	2,40±0,15	2,40±0,15
ET-25M	24,5+0,7,-0,3	24,5+0,7,-0,3	7,00±0,30	7,00+0,10,-0,30	2,5±0,1	(2,50)
ET-28A	28,45±0,55	28,45±0,55	5,00±0,30	5,00±0,20	2,90±0,15	2,90±0,15
ET-35A	35,3±0,6	35,3±0,6	7,50±0,30	7,50±0,25	4,00±0,25	4,00±0,20

*() are typical values.

形状 Type	AL value(nH/N ²)				コア定数 Core parameters					Weight (g)
	MA055	MA070	MA085	MA100	C ₁ (mm ⁻¹)	Le(mm)	Ae(mm ²)	Amin(mm ²)	Ve(mm ³)	
ET-20A	2340±30%	3050±30%	3610±30%	4250±30%	2,96	52,1	17,6	17,6	917	4,64
ET-24A	2020+40,-25%	2570+40,-25%	3130+45,-25%	3680+45,-25%	3,42	61,0	17,8	16,0	1090	5,62
ET-25M	4500±30%	5720±30%	6950±30%	8180±30%	1,51	58,9	38,3	17,5	2250	12,5
ET-28A	2650+45,-25%	3370+45,-25%	4090+45,-25%	4820+45,-30%	2,61	71,4	27,4	25,0	1950	10,0
ET-35A	4670+40,-25%	5940+40,-25%	7220+40,-30%	8490+45,-30%	1,48	86,7	58,6	56,3	5080	25,9